

5009360000
T R SEC ROW COL

BAYFIELD COUNTY LAND SURVEY MONUMENT RECORD

INSTRUCTIONS: This record shall show the location of the corner and shall include all of the following nine elements (a through i).


(a) Identify the corner by reference to the U.S. land survey system.
○ = Corner monument restored.

THE SE CORNER OF SECTION 36, T. 50 N., R. 9 W., IN THE TOWN OF ORIENTA, BAYFIELD COUNTY, WISCONSIN.

(b) Describe any record evidence, monument evidence, occupational evidence, testimonial evidence or any other material evidence you considered, and whether the monument was found or placed.

On December 8, 2008, I found a 3/4" iron rod at the SE corner of Section 36. Corner falls in the centerline of Landon Road and the centerline of Evergreen Road. Corner is 0.20' below ground level.


SECTION 36



BASE STATION: PORT WING GPS (313) LATITUDE: 46°46'29.19611" N LONGITUDE: 91°23'14.63510" W
FOUND CORNER: LATITUDE: 46°45'38.47575" N LONGITUDE: 91°25'34.50384" W

(c & d) Show a plan view drawing depicting the relevant monuments and reference ties which is sufficient in detail to enable accurate relocation of the corner monument if the corner is disturbed. Indicate north.

Witnessed corner as follows: Bearing trees are blazed. Distances are measured to a nail in the tree.

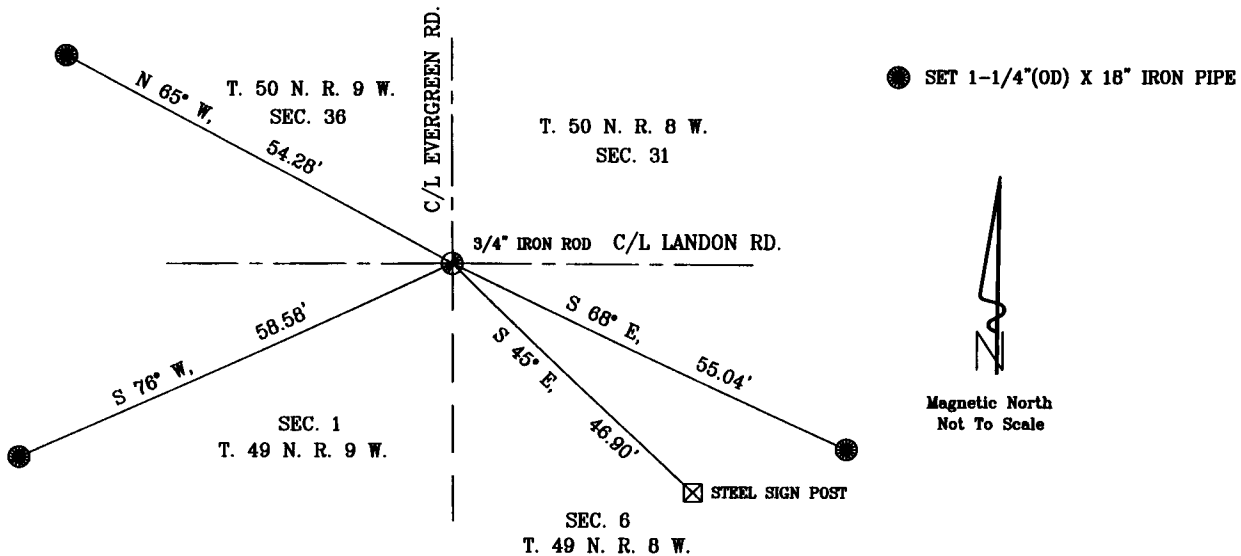

(e) Describe any material discrepancy between the location of the corner as restored or re-established and the location of that corner as previously restored or re-established by distance and direction. Show the discrepancy on the plan view drawing under (d) above. Show the distances between the corner as previously restored or re-established and (1) the corner as restored or re-established, and (2) to at least 2 of the witness monuments shown on the drawing in (d), above.

N/A


(f) Was the corner restored through acceptance of (1) an obliterated evidence location, or, (2) a found perpetuated location?

A Found Perpetuated Location

(g & h) Was the corner re-established through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners used as evidence or or used for proportioning in determining the corner location.

N/A

(i) I, Larry T. Nelson, Registration # 1276, certify that the corner location shown on this record was determined by me or under my direction and control and that this U. S. Public Land Survey Monument Record is correct to the best of my knowledge and belief.



Signature

Date

SECTION 36, T. 50 N., R. 9 W.

NELSON SURVEYING INCORPORATED
101 W. MAIN STREET SUITE 207 ASHLAND, WISCONSIN 54806
(715) 682-2692 FAX: (715) 682-5100
SURVEYING NORTHERN WISCONSIN SINCE 1954
WWW.NELSONSURVEYING.COM ©