


Bayfield County Forestry & Parks Department

Forester: County			Acres: 68	Estimated Volumes			
Twp: 49N	Range: 7W	Sec: 6 & 7	Compartment: 77 & 82		Whole Tree	Roundwood	Logs
Township: Port Wing			Stand: 1/8 & 9/20	Species	Tons	Cords	MBF
Soil: Clay-Loamy Clay	Reforestation Code: Natural	Tract Number: 50-14	Contract Number:	Aspen	2251	735	
Topography: Flat				Mixed Hardwood*	1928	585	
				Balsam Fir**	1453	294	
				Red Oak	343	87	8

* approx. 58% maple, 35% ash, 4% basswood, 2% white birch and 1% other hardwood.
 ** approx. 90% balsam fir, 4% spruce and 1% other conifer.

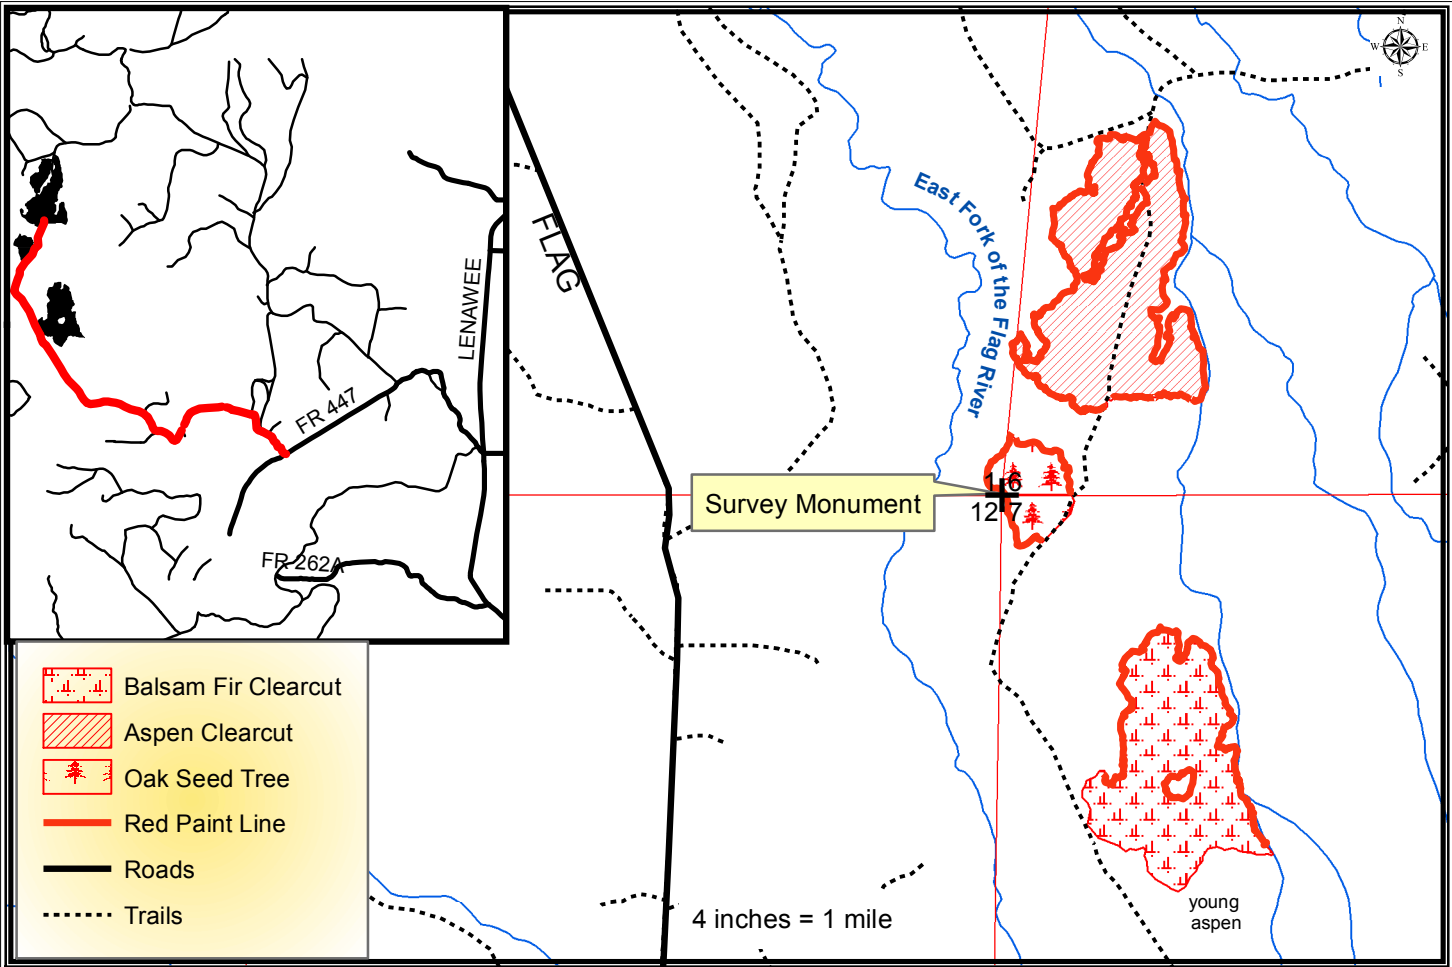

Harvest Requirements:

- Sale is a clearcut and a seed tree being sold on a Ticket Scale Basis
- Sale boundaries consist of red paint line, trails and obvious timber type changes to young aspen.
- **Contractor must contact the County at least 3 weeks prior to moving into the sale to allow the County time to secure final access across USFS property.**
- In All Units: Cut all merchantable hardwood stems except those marked with purple paint. Harvest all merchantable spruce and balsam fir.
- In All Units: Leave all purple marked hardwood stems. Leave all cedar, hemlock and white pine.
- Sever all hardwood stems 2" and greater within the sale area.
- The sale is located approximately two miles off of FR 447.
- Sale operations may only occur when the ground is frozen unless written permission is granted by Bayfield County. No harvest will be allowed between May 1st and September 1st.
- Do not cut snags except for those that pose a safety hazard.
- To comply with the Best Management Practices for Invasive Species: Prior to moving equipment onto or off of the sale area, scrape or brush soil and debris from exterior surfaces to the extent practical.
- Decking of wood along town roads will not be allowed without permission from Bayfield County.
- If harvest will utilize the whole tree, 1 in 10 tops must be left scattered throughout the sale.
- This contract requires County authorization for all road/landing construction and places a number of other requirements on road construction and closure.
- Do not damage any survey monumentation.