



Stock No. 26273

SURVEY NOTES – SECTION 33
TOWNSHIP 47 NORTH, RANGE 07 WEST
BAYFIELD COUNTY, WISCONSIN

THIS SURVEY WAS MADE BY THE U.S.D.A FOREST SERVICE AT THE REQUEST OF THE WASHBURN DISTRICT RANGER OF THE CHEQUAMEGON-NICOLET NATIONAL FOREST. THE PURPOSE OF THIS SURVEY WAS TO RECOVER, RESTORE, ESTABLISH, MARK AND PERPETUATE THE CORNERS AND BOUNDARIES OF NATIONAL FOREST LANDS ON THE PERIMETER AND WITHIN SECTION 33, T 47 N, R 07 WEST, BAYFIELD COUNTY, WISCONSIN.

THE ORIGINAL GOVERNMENT SURVEY OF THE SOUTH TOWNSHIP LINE WAS MADE IN 1852 BY ELISHA S. NORRIS. THE SECTION LINES IN T 47 N, R 07 WEST WERE FIRST SURVEYED BY ALBERT C. STUNTZ IN 1859. THE CLOSING CORNERS ALONG THE SOUTH LINE OF THE TOWNSHIP WERE SURVEYED IN 1858 BY STUNTZ.

JEROD DAY, ASHLAND COUNTY SURVEYOR, RETRACED THE SOUTH LINE OF SECTION 33 IN 1932. ELWOOD OLSON, RLS #785 RETRACED THE WEST LINE OF SECTION 33 IN 1977.

THIS SURVEY WAS MADE USING REAL TIME KINEMATIC GPS. "SOUTH INO" GPS STATION WAS USED AS THE BASE FOR THIS SURVEY. BEARINGS AND DISTANCES ARE GRID BASED ON WISCONSIN NORTH ZONE STATE PLANE COORDINATES. TRUE LINE TRAVERSES WERE MADE USING AN ELECTRONIC TOTAL STATION INSTRUMENT. ERROR OF CLOSURE BETWEEN GPS CONTROLLED POINTS WAS BETTER THAN 1:5000.

BEARING TREES ARE BLAZED, SCRIBED, AND PAINTED WITH RED PAINT. MEASUREMENT TO BEARING TREES ARE TO ALUMINUM NAILS IN THE SIDES OF TREES ABOVE THE CENTER OF THE ROOT CROWN.

NO NOTABLE ENCROACHMENTS WERE FOUND ON NATIONAL FOREST LANDS.

SURVEY WAS MADE IN SEPT-OCTOBER OF 2007.

SURVEY CREW: RANDY ERICKSON, LAND SURVEYOR; GREG MAYER, SURVEYING TECHNICIAN; TED SOMMER, SURVEYING TECHNICIAN.


CORNERS RECOVERED

1. NORTHEAST CORNER OF SECTION 28, T 47 N, R 07 W.
RECOVERED MONUMENT AS DESCRIBED ON DOCUMENT #287770, BOOK 1, PAGE 43 OF CERTIFIED LAND CORNER RECORD, BAYFIELD COUNTY RECORDS, FILED IN 1973 BY RLS #785. 1973 BEARING TREES ARE DEAD. MARKED NEW BEARING TREES:

JACK PINE	5"	S 28° W	15.12 FEET
JACK PINE	5"	N 89° W	12.47 FEET
JACK PINE	5"	N 68° E	11.74 FEET
2. NORTHEAST CORNER OF SECTION 34, T 47 N, R 07 W.
RECOVERED MONUMENT AS DESCRIBED ON DOCUMENT #287764, BOOK 1, PAGE 37 OF CERTIFIED LAND CORNER RECORDS, BAYFIELD COUNTY RECORDS, FILED IN 1973 BY RLS #785.
3. WEST QUARTER CORNER SECTION 33, T 47 N, R 07 WEST.
RECOVERED MONUMENT AS DESCRIBED ON DOCUMENT #320349, PAGE 276, VOLUME 2, BAYFIELD COUNTY RECORDS, FILED IN 1978 BY RLS #785. MARKED A NEW BEARING TREE:

MAPLE	7"	N 58° W	32.71 FEET
-------	----	---------	------------
4. SOUTH QUARTER CORNER SECTION 33, T 47 N, R 07 WEST.
RECOVERED MONUMENT AS DESCRIBED ON DOCUMENT #287764, PAGE 274, VOLUME 2, BAYFIELD COUNTY RECORDS, FILED IN 1978 BY RLS #785. MOVED SIGN POST TO EAST 0.9 FEET.
5. SOUTHEAST CORNER SECTION 33, T 47 N, R 07 WEST.
RECOVERED 1932 DAY MONUMENT, A 3/4" X 28" ROUND IRON PIN. PERPETUATION DESCRIBED ON U.S. PUBLIC LAND SURVEY MONUMENT FORM, FILED WITH BAYFIELD COUNTY IN 2007 BY RLS #1897.
6. NORTHEAST CORNER SECTION 04, T 46 N, R 07 WEST.
RECOVERED 1932 DAY MONUMENT, A 3/4" X 20" ROUND IRON PIN. PERPETUATION DESCRIBED ON U.S. PUBLIC LAND SURVEY MONUMENT FORM, FILED WITH BAYFIELD COUNTY IN 2007 BY RLS #1897.
7. NORTH 1/16 CORNER SECTIONS 32 AND 33, T 47 N, R 07 W.
RECOVERED MONUMENT AS DESCRIBED ON DOCUMENT #320349, PAGE 276, VOLUME 2, BAYFIELD COUNTY RECORDS, FILED IN 1978 BY RLS #785. MARKED A NEW BEARING TREE:

MAPLE	6"	N 72° E	31.34 FEET
-------	----	---------	------------

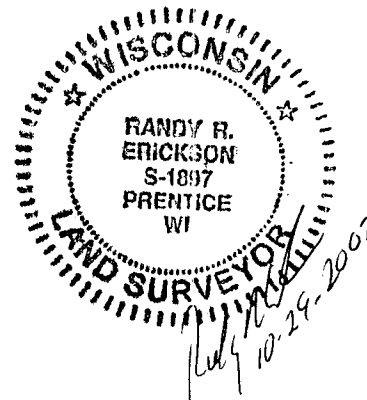



Stock No. 26273

8. SOUTH 1/16 CORNER SECTIONS 32 AND 33, T 47 N, R 07 W.
RECOVERED MONUMENT AS DESCRIBED ON DOCUMENT #320349, PAGE 276, VOLUME 2, BAYFIELD COUNTY RECORDS, FILED IN 1978 BY RLS #785. BTS GOOD.

CORNERS RESTORED

1. NORTHEAST CORNER SECTION 33, T 47 N, R 07 W.
RESTORED CORNER BY DOUBLE PROPORTIONATE MEASURE BETWEEN ADJOINING CORNERS NORTH-SOUTH-EAST AND WEST. PERPETUATION DESCRIBED ON U.S. PUBLIC LAND SURVEY MONUMENT RECORD, FILED WITH BAYFIELD COUNTY IN 2007 BY RLS #1897.
2. NORTH QUARTER CORNER SECTION 33, T 47 N, R 07 W.
RESTORED CORNER BY SINGLE PROPORTIONATE MEASURE BETWEEN THE NORTHEAST AND NORTHWEST CORNERS OF SECTION 33. PERPETUATION DESCRIBED ON U.S. PUBLIC LAND SURVEY MONUMENT RECORD FILED WITH BAYFIELD COUNTY IN 2007 BY RLS #1897.
3. EAST QUARTER CORNER SECTION 33, T 47 N, R 07 W.
RESTORED CORNER BY SINGLE PROPORTIONATE MEASURE BETWEEN THE NORTHEAST AND SOUTHEAST CORNERS OF SECTION 33. PERPETUATION DESCRIBED ON U.S. PUBLIC LAND SURVEY MONUMENT RECORD, FILED WITH BAYFIELD COUNTY IN 2007 BY RLS #1897.
4. NORTH QUARTER CORNER, SECTION 4, T 46 N, R 07 W. C.C.
RESTORED CORNER AT DAY'S 1932 RECORD DISTANCE ON LINE BETWEEN THE SOUTHEAST AND SOUTHWEST CORNERS OF SECTION 33. PERPETUATION DESCRIBED ON U.S. PUBLIC LAND SURVEY MONUMENT RECORD, FILED WITH BAYFIELD COUNTY IN 2007 BY RLS #1897.

CORNERS ESTABLISHED

1. CENTER SOUTH 1/16 CORNER SECTION 33, T 47 N, R 07 W.
ESTABLISHED CORNER MID POINT ON LINE BETWEEN THE CENTER 1/4 AND SOUTH 1/4 CORNERS OF SECTION 33. SET A 2" X 36" ALUM. PIPE MONUMENT WITH A 3" ALUMINUM CAP STAMPED TO IDENTIFY THE CORNER. MONUMENT EXTENDS 5" ABOVE THE GROUND. RESET EXISTING 1" X 30" IRON PIPE ON WEST SIDE OF MONUMENT.
MARKED BEARING TREES:

MAPLE	7"	N 74° W	28.87 FEET
OAK	9"	S 04° W	20.51 FEET
OAK	10"	S 62° W	15.65 FEET
STEEL SIGN POST		WEST	0.7 FEET
2. CENTER-WEST-NORTHWEST 1/64 CORNER, SECTION 33, T 47 N, R 7 W.
ESTABLISHED CORNER MID POINT ON LINE BETWEEN THE NORTH 1/16 AND THE NORTHWEST 1/16 CORNERS OF SECTION 33. SET A 2" X 36" ALUMINUM PIPE MONUMENT WITH A 3" ALUMINUM CAP STAMPED TO IDENTIFY THE CORNER. MONUMENT EXTENDS 4" ABOVE GROUND.
MARKED BEARING TREES:

WHITE BIRCH	4"	N 27° E	32.76 FEET
WHITE BIRCH	5"	N 60° W	13.88 FEET
WHITE BIRCH	3"	S 65° W	34.81 FEET
STEEL SIGN POST		WEST	0.6 FEET

 MEASURE 56 FEET EAST TO EDGE OF EXISTING LAKE SHORE.
MEASURE 76 FEET SOUTH TO EDGE OF EXISTING LAKE SHORE.
3. CENTER-WEST-WEST 1/64 CORNER, SECTION 33, T 47 N, R 07 W.
ESTABLISHED CORNER MID POINT ON LINE BETWEEN THE CENTER WEST 1/16 AND WEST 1/4 CORNERS OF SECTION 33. SET A 2" X 36" ALUMINUM PIPE MONUMENT WITH A 3" ALUMINUM CAP STAMPED TO IDENTIFY THE CORNER. MONUMENT EXTENDS 6" ABOVE GROUND. CORNER FALLS 13 FEET NORTH OF THE CENTER LINE OF FOREST ROAD #426. MARKED BEARING TREES:

WHITE BIRCH	4"	N 82° W	13.08 FEET
WHITE BIRCH	4"	N 79° E	8.41 FEET
OAK	10"	S 14° E	36.15 FEET
STEEL SIGN POST		WEST	0.6 FEET

SURVEYORS AFFIDAVIT

STATE OF WISCONSIN)
COUNTY OF BAYFIELD) SS

I RANDY R. ERICKSON, LAND SURVEYOR FOR THE U.S.D.A. FOREST SERVICE AND A REGISTERED LAND SURVEYOR IN THE STATE OF WISCONSIN DO HEREBY CERTIFY THAT I HAVE SURVEYED AND SUBDIVIDED SECTION 33, TOWNSHIP 47 NORTH, RANGE 07 WEST, 4TH P.M., BAYFIELD COUNTY, WISCONSIN. DURING THIS SURVEY I HAVE COMPLIED WITH THE RULES FOR THE DIVISION OF THE PUBLIC LANDS AND APPLICABLE STATE RULES. THE MAP AND ACCOMPANYING NOTES ARE CORRECT AND ACCURATE TO THE BEST OF MY KNOWLEDGE AND BELIEF.

RANDY R. ERICKSON
WIS. REG. L.S. #1897

DATE: OCTOBER 29, 2007

